

MAINTENANCE CHART

PVSP700MVNo1

PACVAC SUPERPRO 700 SERIES AFTER EVERY USE, ENSURE THAT YOU COMPLETE THE FOLLOWING 5 STEPS

1.



Empty paper bag if used, replace after 5 times. If paper bags are not used, empty cloth bag after every use. Vacuum out cloth bag with another vacuum after 10 hours of vacuuming or as needed.

2.




Remove active air filter and tap out dirt in to a rubbish bin. Do not wet this filter, you will destroy it.

4.




Check exhaust filter, clean as necessary.

3.

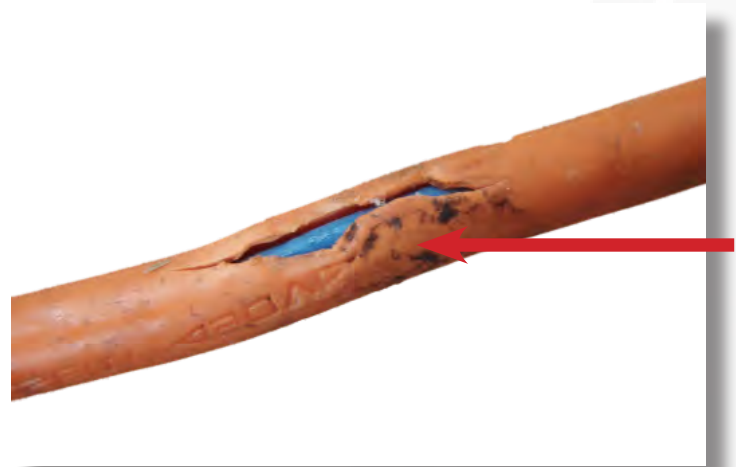

Check power lead for damage, do not use if damaged.

5.

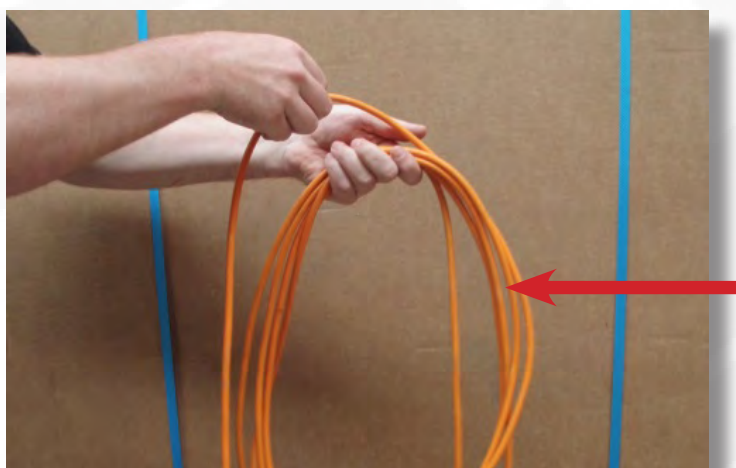

Wind up lead using the hand-over-hand method, always from the machine end first.



REPORT ALL DAMAGES AND TECHNICAL ISSUES TO THE SUPERVISOR

PACVAC POWER LEAD TRAINING TIPS

PVPLTTVNo2

HOW TO CORRECTLY FIT THE POWER LEAD ON THE PACVAC

Parts required:



Power Lead
(KC111/18)



Short Lead
(KC109IEC)



Cord Restraint
(KC268)

1.



Machine with no leads attached.

2.



Attach and loop the white cord restraint onto the frame support.

3.



Feed short lead through cord restraint and plug into machine.

4.



Attach orange extension lead to short lead and fasten into cradle with velcro strap.

5.



Feed the extension lead through the slot in the cord restraint, 20cm from the cradle.

6.



Poke cord restraint tongue through cable loop, then pull lead back through cord restraint, firmly against tongue.

7.



Machine ready for use.



REPORT ALL DAMAGES AND TECHNICAL ISSUES TO THE SUPERVISOR

EXTENSION LEAD TRAINING TIPS

ELTTVNo2

HOW TO LOOK AFTER YOUR EXTENSION LEAD

Following the guidelines listed below daily, will significantly increase the life of your power lead.

DO

*Check for damage and fractures **daily**.*

*If your vacuum is fitted with a cord restraint, **always** ensure this is attached correctly.*

***Always** change to another power outlet near the end of your range.*

*Grip the **plug** when pulling the lead out from the socket.*

*Wind up the lead from the **machine** end.*

*After every use, wind up the lead **hand over hand**.*

DO NOT

*Do not use a **damaged** lead.*

*Do not **tape or glue** a damaged lead.*

*If fitted, don't use a machine **without** the cord restraint.*

*Do not **stretch** the lead when at the end of your range.*

*Do not pull the plug out from the socket by the **lead**.*

*Do not pull on the lead heavily if it is **jammed**, e.g in a doorway.*

*Do not wind up the lead from the **wall** end.*

*Do not wind up the lead over your **elbow**.*


REPORT ALL DAMAGES AND TECHNICAL ISSUES TO THE SUPERVISOR




Change power outlets when needed.



Always wind up the lead from the machine end, this helps to prevent the lead from twisting.

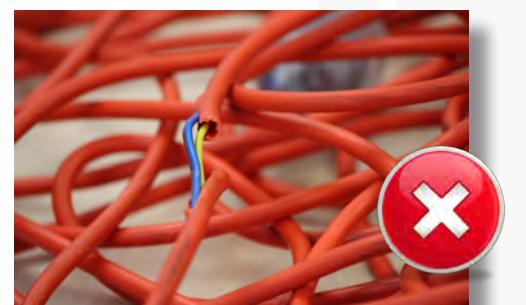

Do not use a damaged lead.

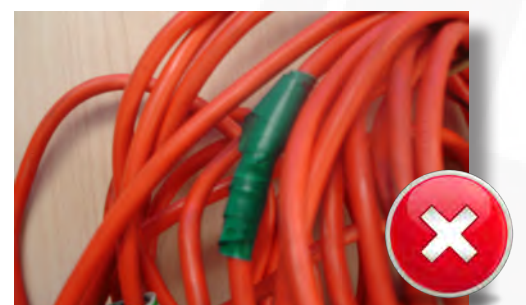

Do not tape or glue damaged leads.



Do not pull the lead when it is jammed.



Do not wind up the lead over your elbow.