



We help you shine.™



## ECLIPSE™ HARD FLOOR FLOOR SEALER

PROQUIP NZ LTD - 0800 277 678 - [www.proquipnz.co.nz](http://www.proquipnz.co.nz)



**Eclipse Hard Floor Sealer** is a water-based acrylic formula sealer for concrete, stone and similar hard floor surfaces.

## DIRECTIONS

Read all directions and Safety Data Sheets (SDS) before using.

1. Strip and properly neutralize the floor, allowing it to dry thoroughly.
2. Apply 2 thin coats of sealer using a clean synthetic mop. Allow floor to dry thoroughly between coats.
3. Apply recommended floor coating, following manufacturer's instructions.

## PRODUCT INFO

<b>Product Code</b>	403FS	403FSE	403MPE
<b>Volume</b>	2.50 US gallons	10 liters	4 liters
<b>Shipping Package</b>	2 x 2.5 gallons	2 x 10 liters	4 x 4 liters
<b>Pallet Quantity</b>	48	48	48


Distributed By:



**Proquip NZ Ltd**  
 t: 0800 277 678  
 e: [sales@proquipnz.co.nz](mailto:sales@proquipnz.co.nz)  
 w: [www.proquipnz.co.nz](http://www.proquipnz.co.nz)

SDS sheets available for download at [pioneereclipse.com](http://pioneereclipse.com).  
 403\_PDS 03/2016

## SURFACES

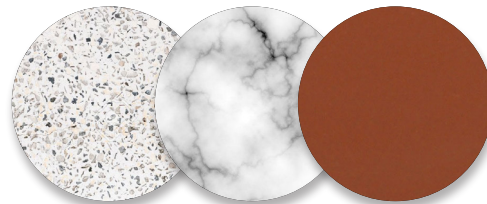

TERRAZZO

MARBLE

QUARRY  
TILE

## TECHNICAL DATA

<b>Description</b>	Polymer emulsion
<b>Appearance</b>	Milky white
<b>Viscosity (Brookfield)</b> @ 68°F (20°C)	<10 centipoise
<b>Coverage Rate</b>	1500 ft <sup>2</sup> /gal first coat 37 m <sup>2</sup> /l 2500 to 3000 ft <sup>2</sup> /gal 61 to 74 m <sup>2</sup> /liter
<b>Dry Time</b>	About 30 minutes
<b>Removability</b> ASTM D1792-06	Semi-permanent
<b>VOC</b> 40 CFR Part 59 Subpart C	7.02 %
<b>Non-Volatile Solids</b> ASTM D2834-95 (2008)	19%
<b>pH</b> ASTM E70-07	7.8
<b>Fragrance</b>	Slight solvent
<b>Slip Resistance</b> ULTM410	Meets requirements
<b>Shelf Life</b> ASTM D1791-93 (2008)	1 year
<b>Density</b> ASTM D1475-98 (2008)	8.5 lb/gal @ 68°F 1.02 kg/L @ 20°C
<b>Detergent Resistance</b> ASTM D3207-92 (2008)	Excellent
<b>Freeze/Thaw</b> ASTM D3209-93 (2008)	Passes 3 cycles
<b>Container</b>	2.5 US gal/9.5 L (FS packaging) 2.64 US gal/10 L (FSE packaging) 1.06 US gal/4 L (MPE packaging)



Floor Coating and Finishing materials  
 as to slip resistance only. 42E6

