



We help you shine.™

FORMULA X-TREME™

ULTRA HIGH PERFORMANCE STRIPPER

PROQUIP NZ LTD - 0800 277 678 - www.proquipnz.co.nz



Formula X-TREME™

ULTRA HIGH PERFORMANCE STRIPPER



With a concentrated, powerful, non-ammoniated formula, **Formula X-Treme** cuts through heavy build-up and hard to remove water-based sealers in record time.

DIRECTIONS

Read all directions and Safety Data Sheets (SDS) before using.


1. Mix stripper with cold water per the following dilutions:
Heavy coating removal: 1:20 (6.4 US oz per gallon/50 ml per 1 liter water).
Normal coating removal: 1:30 (4.3 US oz per gallon/34 ml per 1 liter water).
Light coating removal: 1:40 (3.2 US oz per gallon/25 ml per 1 liter water).
2. Apply solution liberally to the floor and allow to soak for 10 minutes ensuring the solution does not dry.
3. Scrub floor with automatic scrubber or stripping machine. Pick up dirty solution with automatic scrubber or wet vac.
4. Rinse thoroughly with clean water and allow floor to dry completely before applying any finish.

Note: Test floor for color fastness in an inconspicuous area.

PRODUCT INFO

Product Code	549FS	549FSE	549MP	549MPE
Volume	2.50 US gallons	10 liters	1.06 US gallons	4 liters
Shipping Package	2 x 2.5 gallons	2 x 10 liters	4 x 1.06 gallons	4 x 4 liters
Pallet Quantity	48	48	48	48

SURFACES

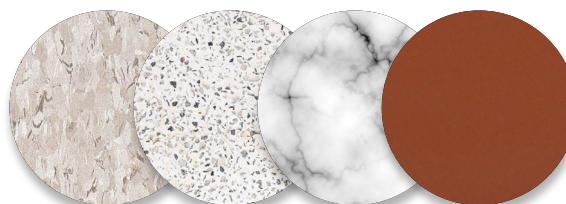

VCT

TERRAZZO

MARBLE

QUARRY
TILE

TECHNICAL DATA

Description	Non-ammoniated, ultra high performance stripper
Appearance	Clear liquid
Viscosity (Brookfield) @ 68°F (20°C)	<20 centipoise
Flash Point ASTM D56-05 (2010)	144°F (62°C)
VOC 40 CFR Part 59 Subpart C	60% (as supplied) 2.8% (1:20) 1.90% (1:30) 1.43% (1:40)
Fragrance	None added
Shelf Life ASTM D1791-93 (2008)	2 years
Density ASTM D1475-98 (2008)	8.2 lb/gal @ 68°F 0.98 kg/L @ 20°C
Container	2.5 US gal/9.5 L (FS packaging) 2.64 US gal/10 L (FSE packaging) 1.06 US gal/4 L (MP packaging) 1.06 US gal/4 L (MPE packaging)

Distributed By:



Proquip NZ Ltd
t: 0800 277 678
e: sales@proquipnz.co.nz
w: www.proquipnz.co.nz

