

# TwinTec Vario

Two Into One Goes Again, Even Bigger

The TwinTec Vario 5565 represents, in every way, the optimum walk behind traction auto-scrubber with a range of advanced, yet practical, features that truly allow us to claim... “Best in Class”.

This TwinTec gets its Vario name from the fact that this one machine can, by a no tools adjustment and simple brush change, be set to operate at either a 55cm or 65cm scrubbing width... two machine choices in one.



- Flexifill System**  
 Easy filling and emptying with the flexifill system.
- Complete Cleaning Control**  
 Simple one touch dosing control and versatile variable speed control.
- Adjustable Scrub Widths**  
 55cm or 65cm scrubbing width by virtue of the adjustable dual setting Vario deck design.
- Spot Cleaning**  
 Heavy duty spot cleaning means operator can over-ride standard brush pressure to 50kg for extra performance.
- Easy Transportation**  
 Built in easy transit mode for easy transportation between areas.
- On Board Charging**  
 Convenient and easy, just plug and go. Fully sealed low maintenance gel batteries.
- Simple Operator Control**  
 Nutronic soft touch operator controls.
- Safety Features**  
 Built in emergency stop button and removable power off key are just two of the many safety features.




Easy battery access

Beneath the hinged dirty water tank sits the operating heart of the Vario with its 200Ahr gel battery and charging system, high performance suction unit and NuChem dosing facility... all easily accessible.

## The unique Twintec 55cm/65cm dual brush system...

A simple, no tool adjustment and brush change allows a selection of either 55cm or 65cm scrubbing widths.

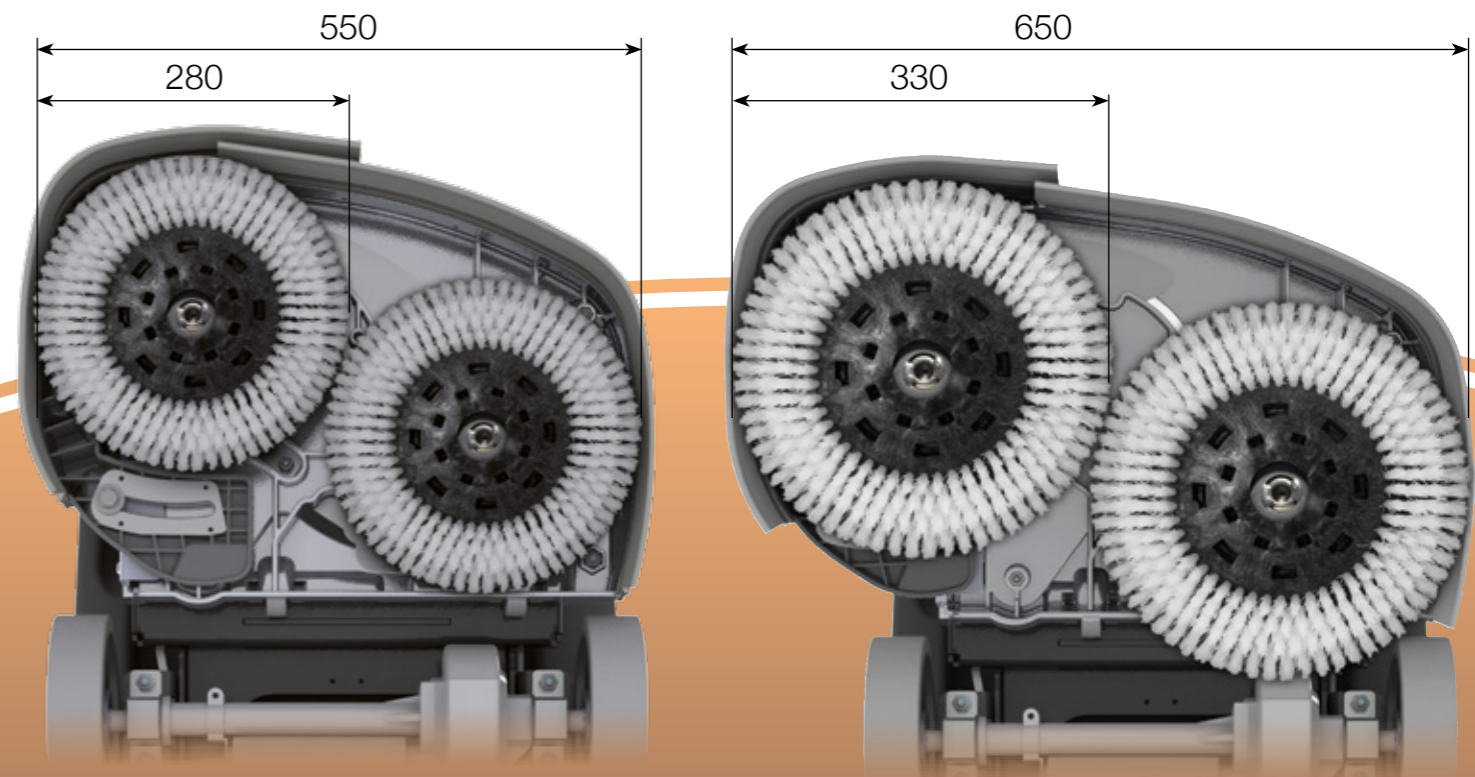

In the 65cm mode the scrubbing head is automatically expanded to a practical offset operating mode, providing a 100mm head extension to the right hand side. This simple arrangement allows improved edge cleaning especially in aisles with racking or other obstructions.

The operator controls are a separate feature in their own right with independent selection of speed, water flow and chemical dosing all built in to the basic unit, all of which can be set to provide total convenience and consistency of operation.



Simple to use Nutronic control panel



TTV5565

Model	Brush Motor	Vac Motor	Power	Run Time	Traction Drive	Drive Speed	Cleaning Speed	Climbing Gradient	Scrub Widths
TTV5565	2x400W	600W	4 x 12V (24V) = 200Ahr	3.5 Hrs	480W	4.2km/h	4.2km/h	9%	550mm 650mm
Brush Speed	Water Capacity	NuChem Capacity	Water Flow Rate	NuChem Mix		Weight	Dimensions (WxLxH)		
200rpm	85L	Optional 5L	3, 2, 1, .5L/min	25:1, 50:1, 75:1, 100:1		287kgs	585x1400x1135mm		